


Ranger static and dynamic performance†

- Static
 - Position accuracy: 22.8 mm
 - Repeatability: 0.5 mm
- Dynamic
 - Average path accuracy: 0.8 mm
 - Average path repeatability: 0.26 mm

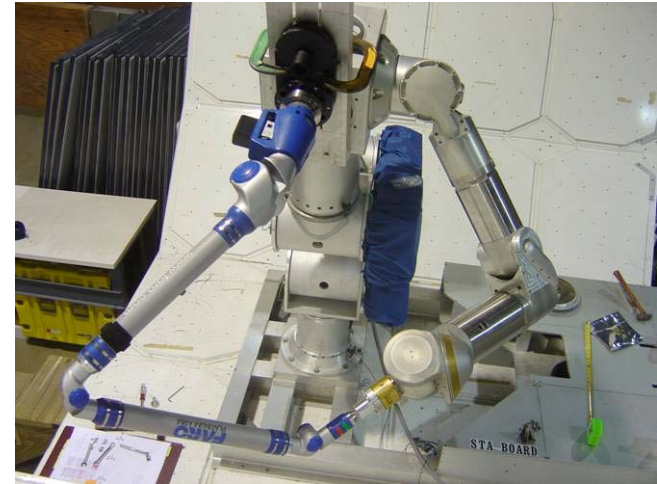

† As per ANSI/RIA R15.05-1-1990